

# Home Office Energy-Saving Surge (ES1)

ES1653W-05 / ES1654W-05



Saves Energy




2160 **JOULES**

**6**  
OUTLETS

**SPACED**  
OUTLETS

**RJ11 / RJ45**  
PROTECTED

— OR —  
**COAX**  
PROTECTED

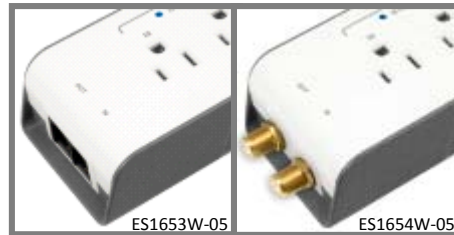

## Save Energy

The SMART Surge line of products save energy and money. Simply turn off the device plugged into the Master socket and power to the Energy Saver sockets is turned off as well.

- 6 Surge protected (2160J) AC outlets switchable between energy-saving or standard
- 1 Master outlet with LED controls on/off status of 3 Energy Saver outlets
- 2 Always On outlets with LEDs provide continuous power for connected devices
- Protected LED (Red) indicates surge protection is working
- Grounded LED (Green) indicates the wall outlet is properly grounded
- Energy Saver LED (Blue) indicates energy-saving outlets are powered 'On' by the Master outlet
- Choice of combo RJ11 / RJ45 jacks or Coax connectors provide protection against line surges
- Resettable circuit breaker protects against overloads over 15 amps

UPC: 8-91071-00043-9 (ES1653W-05)

8-91071-00044-6 (ES1654W-05)

MSRP: \$39.99

Dimensions	15.5 x 2.75 x 1.5in.
Cord Length (Feet)	5 Feet
"Standby Power" Activation	<1 Watt
Electrical Rating	120VAC, 15AMP, 60Hz, 1800 Watts
Surge Rating (Joules)	2,160
Max Spike Voltage (Volts)	6,000
Max Spike Current (Amps)	144,000
Clamping Voltage (UL 1449 Rev 3)	400V
Suppression Response Time	<1 Nanosecond
EMI/RFI Noise Reduction	150KHz - 100MHz, up to 48 dB



IDEATIVE Product Ventures, Inc.  
1846 E. Rosemeade Pkwy, Ste 144  
Carrollton, Texas 75007 USA

Sales@SocketSense.com  
www.SocketSense.com  
877-484-IDEA

